


**ISLANDER®**

# FP320\*\*1-220 Ceiling Fan

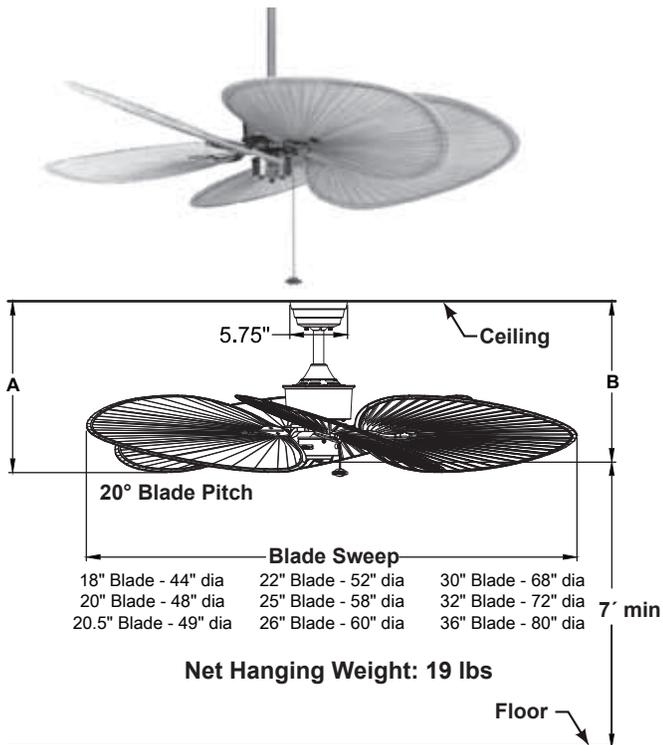

Available Finishes	
AB	Antique brass
BL	Black (Damp)
MW	Matte white (Damp)
OB	Oil-rubbed bronze (Damp)
PW	Pewter
RS	Rust (Damp)
SN	Satin nickel (Damp)

	A	B
Fan w/6" downrod	17.11"	16.07"
Fan w/12" downrod	23.11"	22.07"
Fan w/18" downrod	29.11"	28.07"
Fan w/24" downrod	35.11"	34.07"
Fan w/36" downrod	47.11"	46.07"
Fan w/48" downrod	59.11"	58.07"
Fan w/60" downrod	71.11"	70.07"
Fan w/72" downrod	83.11"	82.07"

## INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

## ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 220~240 volts AC, 50Hz, 5 amp circuit.

## MOTOR SPECS:

FK2100-220 motor is designed for optimal performance with this fan.

## FAN SPEEDS:

Material, shape and size of fan blade will affect fan speed. In general, smaller blades will turn faster than larger ones and narrower blades will turn faster than the wider ones.

## BLADES:

A variety of 4- and 5-blade sets are available. 5-blade sets are available in palm, bamboo, wood and composite materials. 4-blade sets are made of wood and require the use of BH20 series blade holders (not included). 4-blade sets will increase speed and airflow. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for blade options.

## CONTROL OPTIONS:

Optional C1-220 and C3-220 wall control is available for 220V models—sold separately. Instructions are provided with each control.

## LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available lighting options.

## DOWNROD OPTIONS:

Fan comes with 1" dia. x 6" long wet-location downrod (DR1-6). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

## LOCATION USE:

Fan is dry location rated only, except where (Damp) is noted next to above listed finish codes.

## TUV/GS Efficiency Info (220V)

Fan Speed	Max RPM	Amps	Watts
High	106	0.39	91
Med	66	0.22	32
Low	36	0.15	13