

# Holly Flush Mount

5539493S, 5639493S, 5739493S, 5839493S | 1.0

GENERATION LIGHTING

## CEILING

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

For a complete list of dimmers, visit our website at [www.seagulllighting.com](http://www.seagulllighting.com).

This instruction shows a typical installation.

GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 160077

800.969.3347

[www.generationlighting.com](http://www.generationlighting.com)


© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

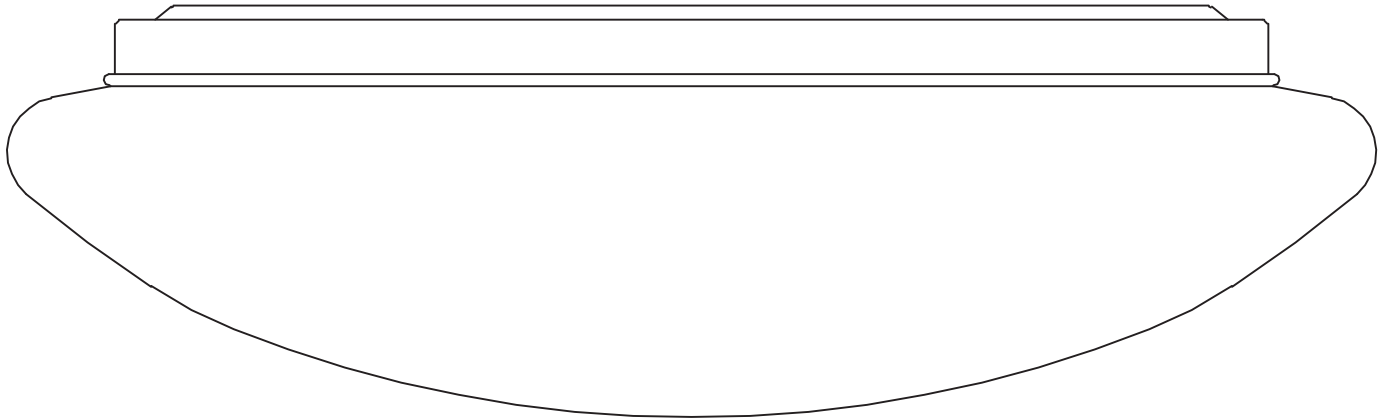

**SAVE THESE INSTRUCTIONS!**

## Install the Fixture

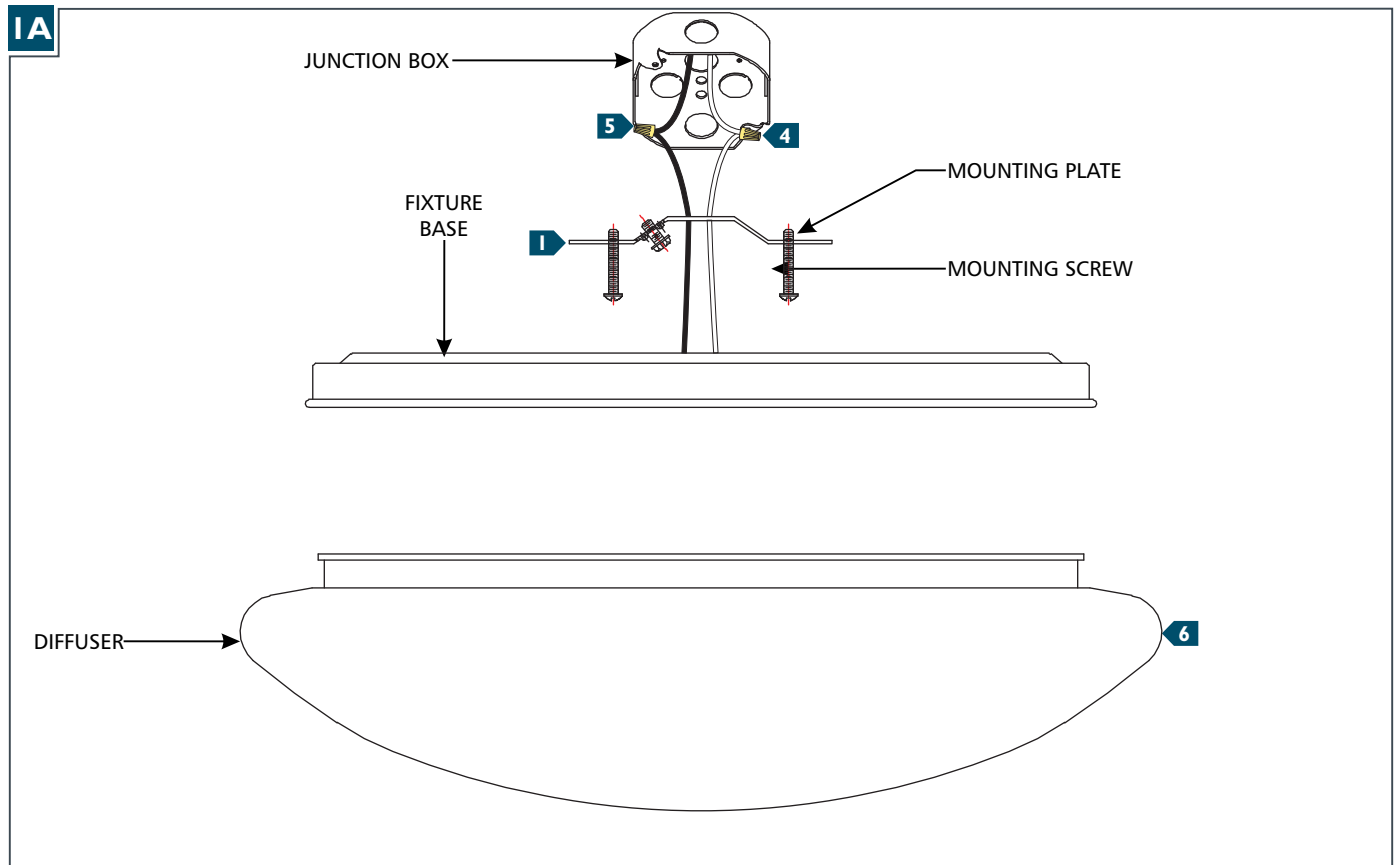

- 1** Secure the mounting plate to the junction box leaving enough of the mounting screw exposed to mount the fixture later.
- 2** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 3** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 5** Align the key slots on the fixture base to the mounting screws, place the fixture base onto the mounting plate, and secure it by rotating it to the narrow portion of the keyed slot. Fully tighten the mounting screws to secure the fixture base in place.
- 6** Install the diffuser to the fixture base.