

# Hobson 3 Light Island

F3017/3, F3019/3, F3021/3 1.2

## GENERATION LIGHTING CHANDELIER

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
**Use minimum 90°C supply conductors.**

**SAVE THESE INSTRUCTIONS!**

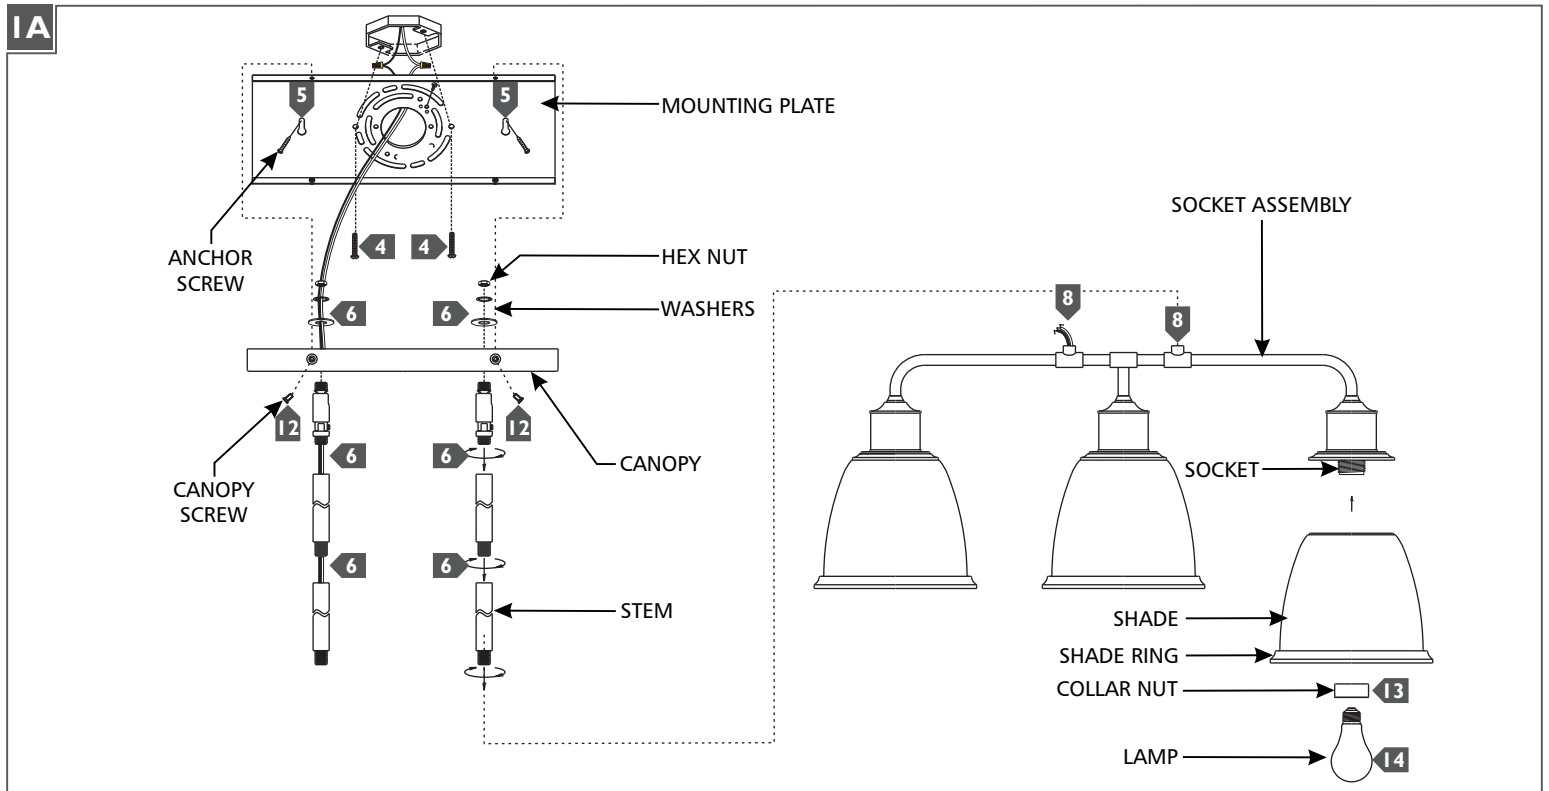

- 1** Temporarily install the mounting plate to the junction box.
- 2** Mark the anchor hole locations on the mounting plate and remove the mounting plate.
- 3** Drill appropriate size holes at the marked locations and install the anchors.
- 4** Secure the mounting plate to the junction box.
- 5** Screw the anchor screws into the anchors.
- 6** Determine the wanted height of the fixture with the provided stems and assemble them by screwing them together. Then secure the stems to the canopy with the provided washers and hex nuts in the order shown.
- 7** Feed the cord through the stem, canopy, and out of the electrical box. Trim the cord leaving enough to make electrical connections.
- 8** Screw both stems to the top of the socket assembly
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box and/or canopy, place the canopy onto the mounting plate, and secure it in place by using the canopy screws.
- 13** If necessary, place the shade ring onto the shade so that it rests as shown, then place the shade onto the socket and secure it in place by screwing the collar nut onto the socket. Repeat for remaining shades.
- 14** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.

GENERATION LIGHTING  
 7400 Linder Ave., Skokie, IL 60077  
 T 847.410.4400 | F 847.410.4500  
[www.generationlighting.com](http://www.generationlighting.com)