

# Metcalf 3, 5, 9 and 12 Light Chandelier

3113203, 3113205,  
3113209, 3113212 1.2

GENERATION LIGHTING

## Chandelier

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


[www.generationlighting.com](http://www.generationlighting.com)

© 2020 Generation Lighting. All rights reserved.  
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

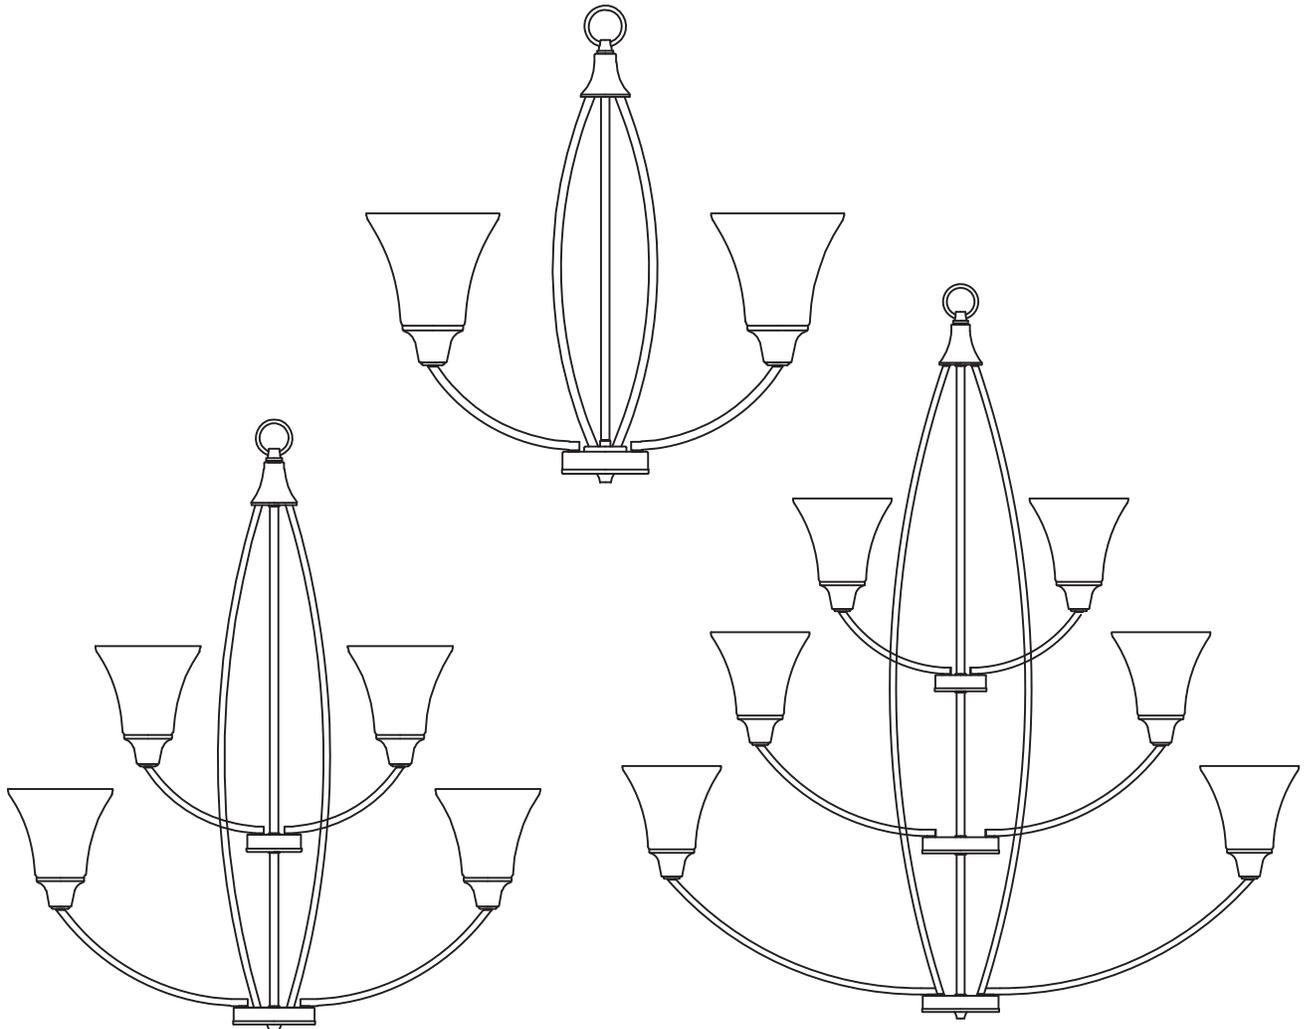

**SAVE THESE INSTRUCTIONS!**

# Install the Fixture

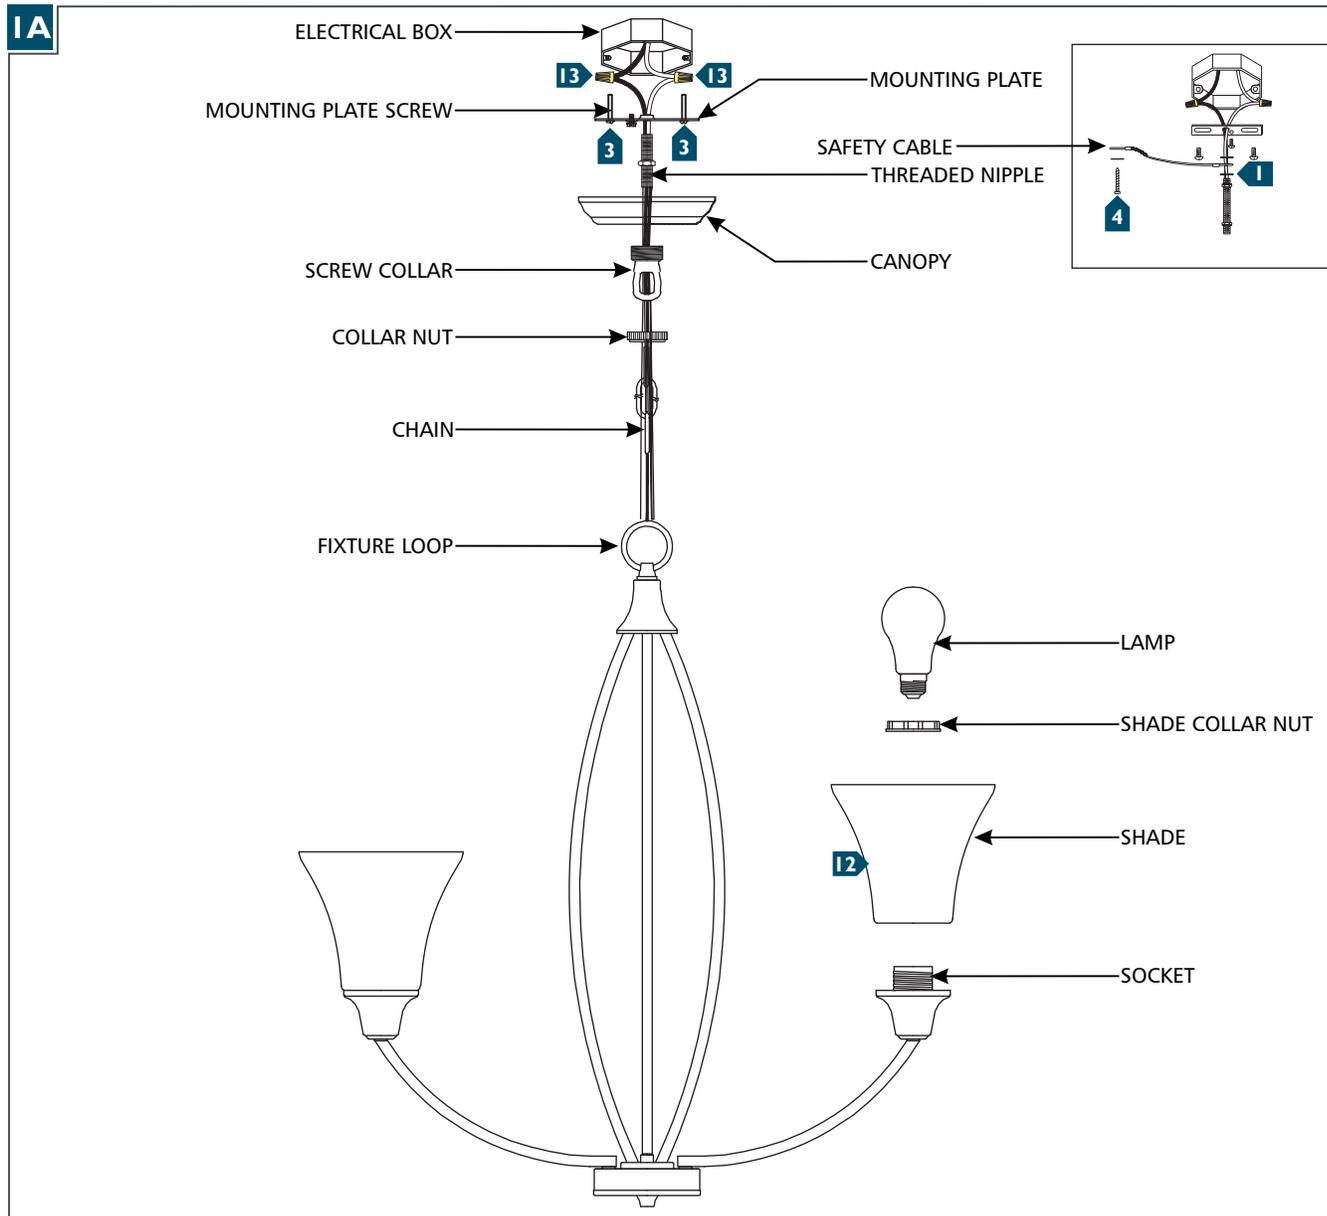

- 1** **For 3113212 only:** Place the safety cable with washers on each side to the shorter end of the threaded nipple and screw it tightly onto the mounting plate, then screw the screw collar onto the threaded nipple.
- 2** If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 3** Secure the mounting plate to the junction box.
- 4** **For 3113212 only:** Secure the safety cable to a secure solid structure in accordance with local building code. Temporarily unscrew and remove the collar nut and screw the screw collar tightly onto the threaded nipple.
- 5** Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
- 6** Install the canopy and collar nut onto the chain (in that order), then install the open link onto the fixture loop and secure it in place by closing the link.
- 7** Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the electrical box. Trim the cord leaving enough to make electrical connections.
- 8** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 9** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 10** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 11** Neatly place all the wires into the electrical box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 12** Install the shades by properly placing them over the sockets and securing them in place by tightly screwing the shade collar nuts onto the sockets.
- 13** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.