GENERATION LIGHTING

Wall

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction hoves

This product is safety listed for damp locations.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 160077 800.969.3347


www.generationlighting.com


© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.






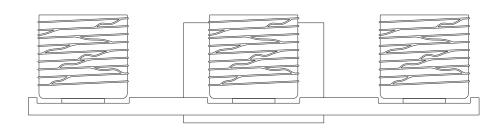

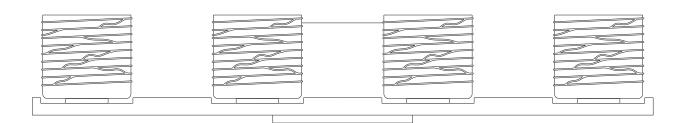

Install the Fixture

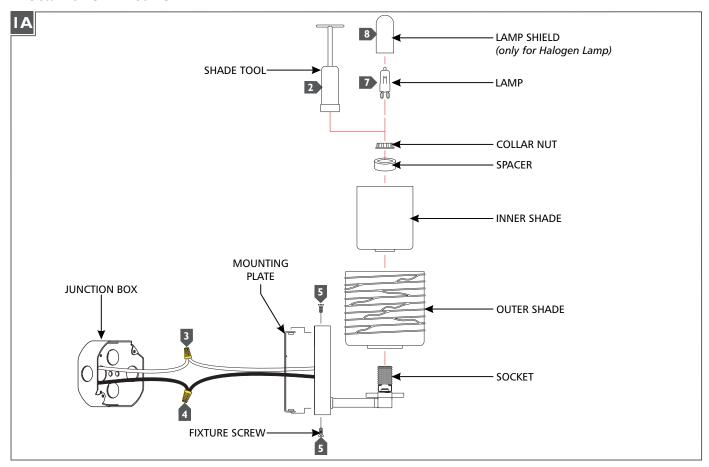

- I Secure the mounting plate to the junction box.
- Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire to the hot power line wire with a wire nut.
- Mount the fixture base onto the mounting plate and secure it with the fixture screws. WARNING: If using halogen lamps, this fixture must be mounted in the <u>UP</u> position only. If using LED lamps, this fixture can be mounted in the up or down position.
- 6 Place the outer, inner shade, and spacer onto the socket (in that order), then secure them in place by screwing the collar nut onto the socket using the shade tool.
- Using a soft cloth (halogen lamps only), install the lamps by pushing the lamp pins into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 8 For Halogen Lamps Only: Install the lamp shields over the lamps.