

Paisley Wall

AW1121, AW1112 | 1.0

GENERATION LIGHTING WALL

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

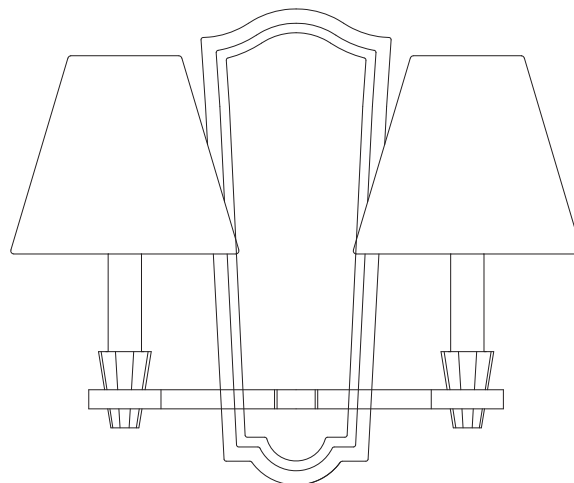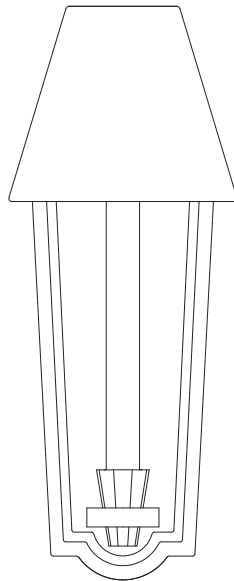

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

IA

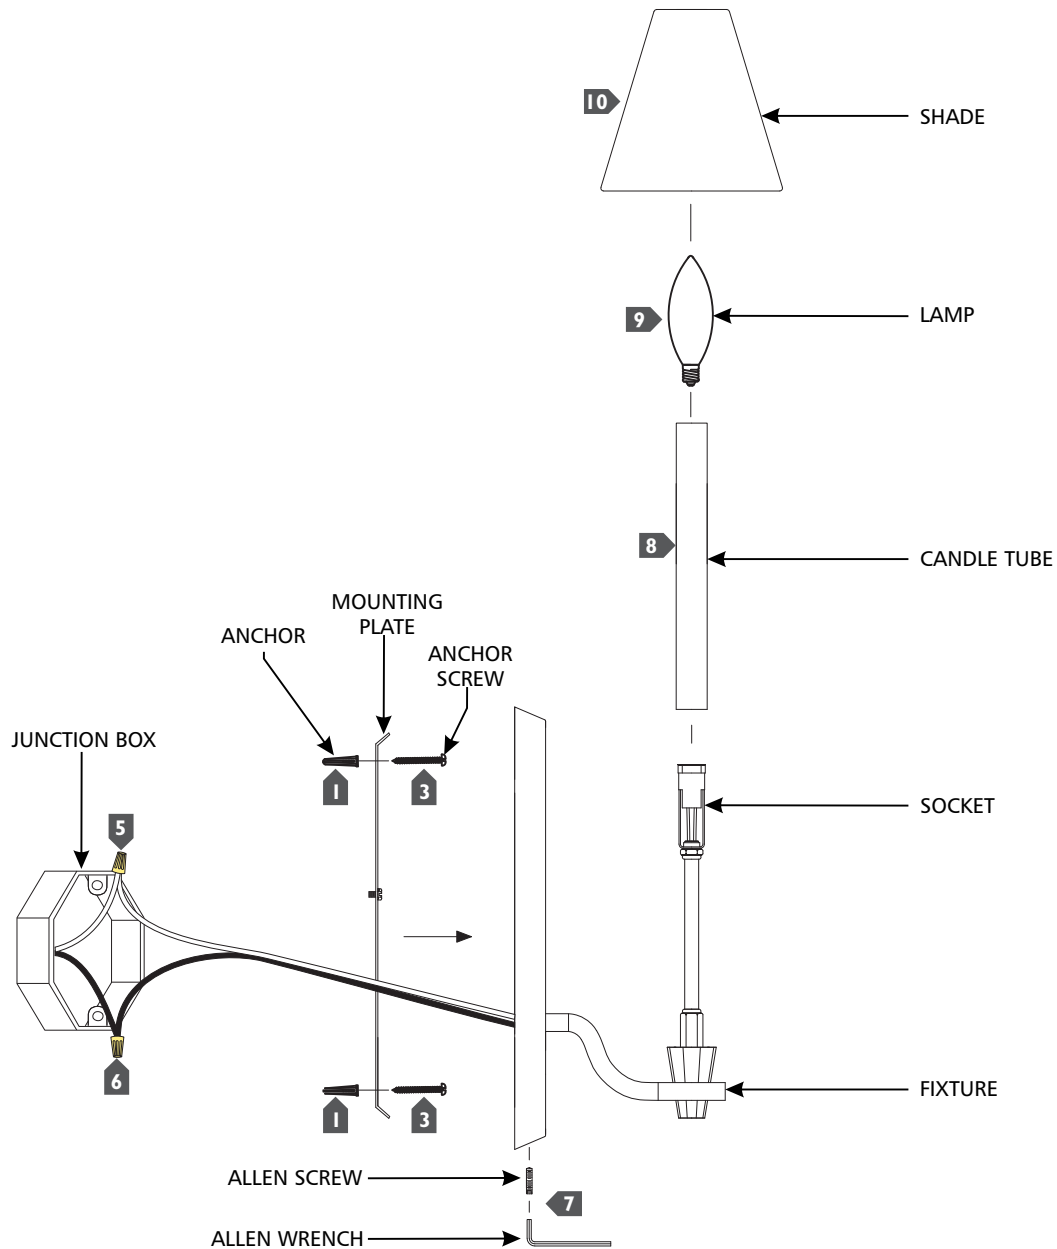

- 1 Temporarily secure the mounting plate to the junction box and mark the location of the anchors, then remove the mounting plate.
- 2 At the marked locations, tap the anchors into the drywall then use a screw driver to screw them all the way in.
- 3 Secure the mounting plate to the junction box and screw the anchor screws through the anchors.
- 4 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 5 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 7 Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the allen screw and allen wrench.
- 8 Place a candle tube over each socket.
- 9 Screw the lamp(s) into the socket(s). Refer to the label on the lamp socket for Max Wattage Information.
- 10 Install the shade(s) by placing one on to each lamp.